


环保物料



N=Number of Contacts

产品型号	MODEL	KD100
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M3.0, 钢, 镀锌 steel, Zinc Plated
触点	Contact	黄铜, 镀镍 Brass, Nickel plated
焊针	Pin header	-
塑件	Housing	PA66, UL94V-0
电气性能	ELECTRICAL	
额定电压	Rated voltage	450V
额定电流	Rated current	7.5A
接触电阻	Contact resistance	20mΩ
绝缘电阻	Insulation resistance	5000MΩ/1000V
耐电压	Withstanding voltage	AC2500V/1min
使用线径	Wire range	22-14AWG 0.5-2.5mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+110℃
瞬时温度	Max. soldering	+250℃, 5sec
扭矩	Torque	0.5N.m 4.4Lb.in
剥线长度	Strip length	6-7mm

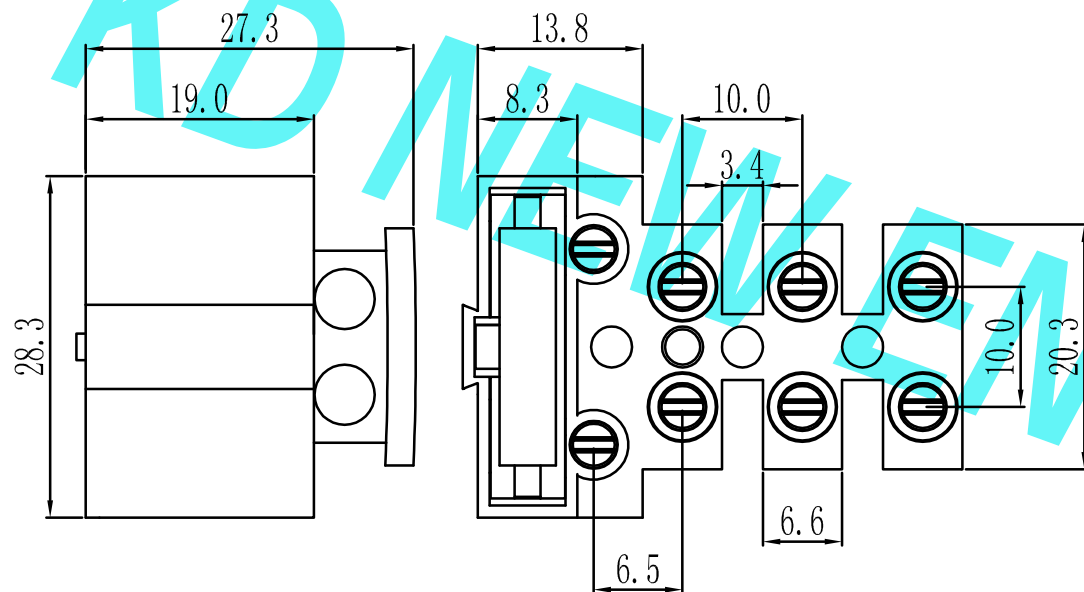

GENERAL TOLERANCES

LINEAR

ANGLES

0.0±0.25

X° REF±6°

0.00±0.15

X° ±3°

0.000±0.08

X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2019.02.25



东莞市康号新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgconne.cn

公司电话: 0769-85337633

邮箱: 2850175986@qq.com

公司传真: 0769-85392827

PART. NO:

KD100

DWG. NO:

KDTB-0190

REV: A0

SHEET: 1/1

TITLE:

10.00mm pitch FEED THROUGH TERMINAL BLOCKS