


环保物料

产品型号	MODEL	TB-250
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M4.0, 钢, 镀镍 Steel,Nickel Plated
端子	Terminal	黄铜, 1.0t 镀锡 Brass,Tin Plated
塑件	Housing	PC
电气性能	ELECTRICAL	
额定电压	Rated voltage	600V
额定电流	Rated current	25A
绝缘电阻	Insulation resistance	500M Ω /DC500V
耐电压	Withstanding voltage	AC2000V/1min
使用线径	Wire range	22-12AWG 4.0mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+105℃
扭矩	Torque	1.2N.m 10.53Lb.in

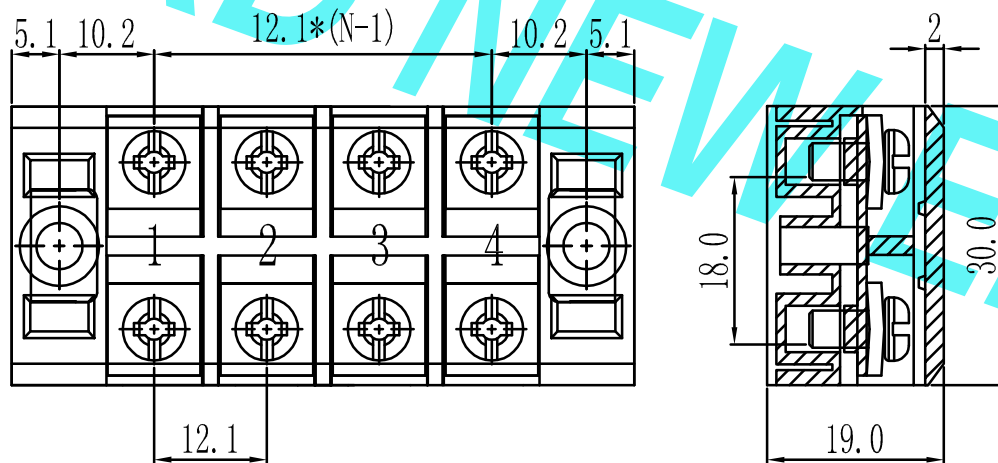

N=Number of Contacts

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: TB-250	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2019.02.25		UNIT: MM	0.00±0.15					X° ±3°	DRAWN
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°						