
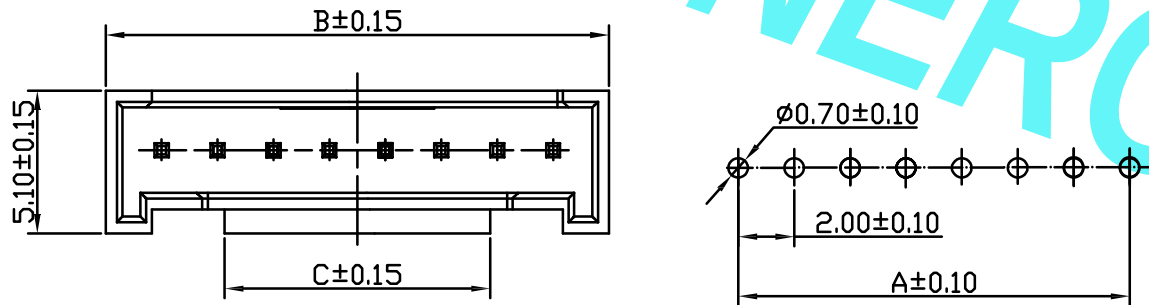


环保物料

Pin数	尺寸A	尺寸B	尺寸C
2	2.00	6.00	2.80
3	4.00	8.00	3.20
4	6.00	10.00	3.50
5	8.00	12.00	5.50
6	10.00	14.00	7.50
7	12.00	16.00	9.50
8	14.00	18.00	11.50
9	16.00	20.00	13.50
10	18.00	22.00	15.50
11	20.00	24.00	15.50
12	22.00	26.00	15.50
13	24.00	28.00	15.50
14	26.00	30.00	15.50
15	28.00	32.00	15.50

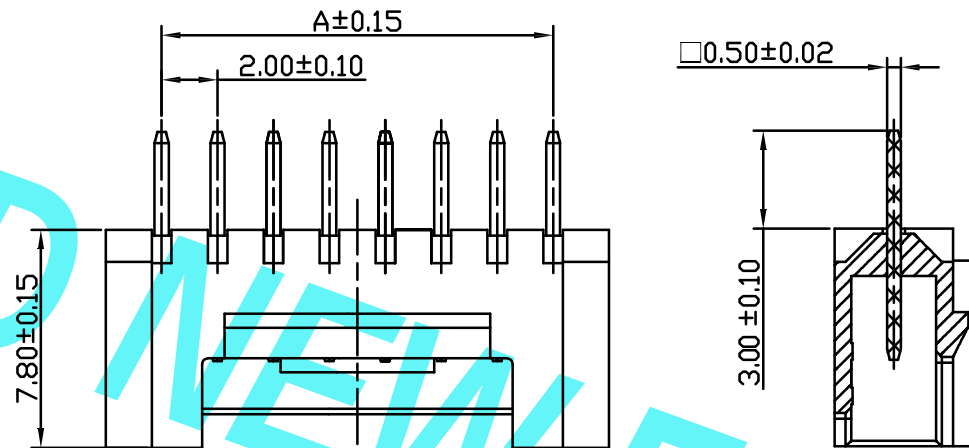

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#22-#30
Applicable Wire:AWG#24-#32
- ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 2A, AC, DC (AWG#22)
Current rating:2A, AC, DC (AWG#22)
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-V2
Insulator:Nylon66 UL94-V2
- ◆接触针: 黄铜
Contact PIN:Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: PHS-HA		
				LINEAR	ANGLES					APPROVED		
				0. 0±0. 25	X° REF±6°	DESIGNER						
AO	新图面发行	2018. 12. 05	UNIT: MM	0. 00±0. 15	X° ±3°					TITLE: 2. 00mm pitch Single Wafer	REV: AO SHEET: 1/1	
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 05				