
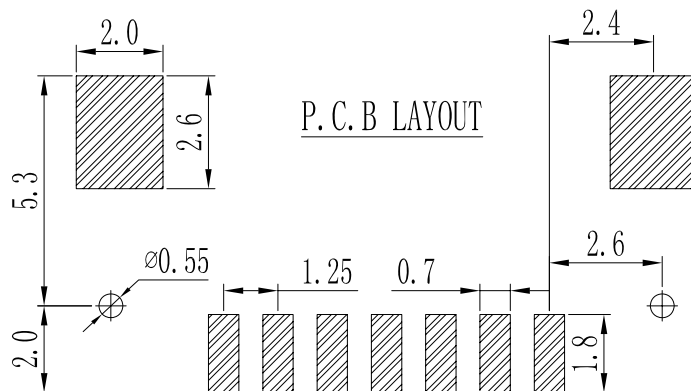
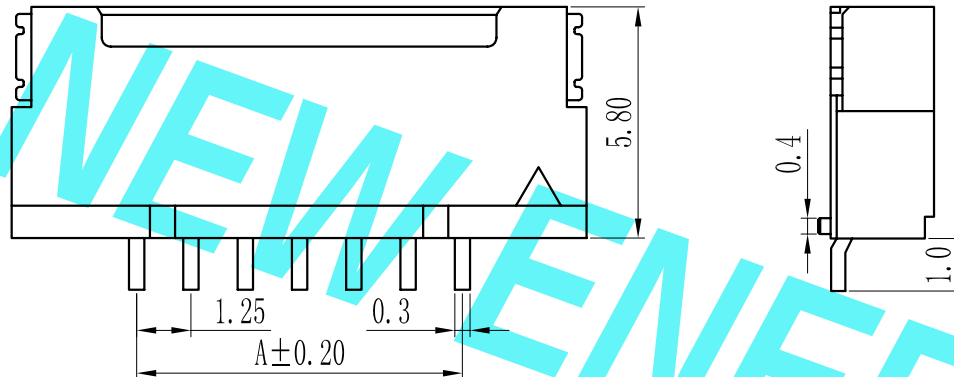


环保物料

Pin数	尺寸A	尺寸B
2	1.25	7.45
3	2.50	8.70
4	3.75	9.95
5	5.00	11.20
6	6.25	12.45
7	7.50	13.70
8	8.75	14.95
9	10.00	16.20
10	11.25	17.45
11	12.50	18.70
12	13.75	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
16	18.75	24.95
17	20.00	26.20
18	21.25	27.45
19	22.50	28.70
20	23.75	29.95
21	25.00	31.20
22	26.25	32.45
23	27.50	33.70
24	28.75	34.95
25	30.00	36.20

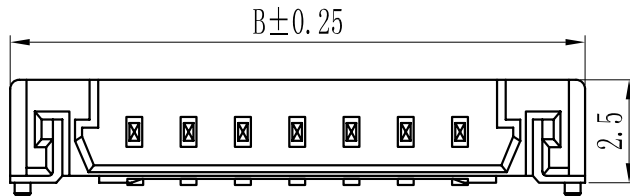

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 0.5A, AC, DC (AWG#28)
Current rating:0.5A, AC, DC (AWG#28)
- ◆耐压值: 250V AC/minute
Withstand voltage:250V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥100MΩ
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0
Insulator:Nylon46, UL94-V0
- ◆接触针: 磷铜
Cobtact PIN:Phosphor bronze
- ◆焊片: 磷铜
Solder tab:Phosphor bronze

REV.	新图面发行	2018. 11. 29	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°			
				0.00±0.15	X° ±3°			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 11. 29


东莞市康号新能源科技有限公司
 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD
 公司网址: www.dgoonne.cn 公司电话: 0769-85337533
 邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:
 1.25mm pitch Single Wafer

PART. NO: 1.25T-5 (DF14)

DWG. NO:

REV: A0 SHEET: 1/1